



prime tac

800 Series (Masking)

800 | 5.1 Mil General Purpose Crepe Masking Tape

Our Primetac™ 800 masking tape is a premium general purpose tape built for packaging, bundling, protection, and holding. The synthetic rubber adhesive allows this tape to stick to a wide variety of surfaces.

GENERAL PURPOSE



Built for Bundling



Ideal for Labeling



Clean Removal



Hand-Tearable



Built for
Irregular Surfaces

BUILT FOR



Construction



Abatement/Restoration



Transportation



Painting



Industrial Packaging



Graphic Arts

Specifications

Adhesive

Synthetic Rubber

Total Thickness

5.1 mil | 130 microns
PSTC-133

Adhesion to Steel

2.8 lb / inch (0.5 kg / cm)
PSTC-101

Tensile Strength

17.6 lbs / inch (3.2 kg / cm)
PSTC-131

Max Temp. Resistance

149°F (65°C) / 30 min

Features

- ✓ Clean removal thanks to strong crepe paper backing
- ✓ Strong adhesion and holding power on a variety of surfaces including paper, painted, metal, glass, and wood
- ✓ Excellent shear properties
- ✓ Hand tearable for ease of use
- ✓ Cost effective tape with a variety of applications

Other Physical Properties

Property	Backing	Elongation at Break PSTC-131	Application Temperature Range
Standard	Crepe paper	10% ± 5%	50°F - 104°F (10°C - 40°C)
Metric	Crepe paper	10% ± 5%	50°F - 104°F (10°C - 40°C)

Test Condition: Temperature: 23°C ± 2°C (73.4°F ± 3.6°F) | Relative Humidity: 50% ± 5%

Applications

- Labeling / temporary attaching
- Paint masking
- Splicing & bundling
- Protection

Storage and Usage

Suggested Storage Conditions:

- 15°C - 30°C (59°F-86°F), or as close as possible to room temperature.
- 60% Max Relative Humidity
- Original packaging in a cool, dry area away from direct sunlight exposure and from freezing.

Suggested Application Conditions

- 50°F - 104°F (10°C - 40°C)
- Surfaces to which tape is applied should be clean, dry and free of dust, grease, oil or other contaminants.


Available
Product Options

Stock Lengths



55m

Stock Widths

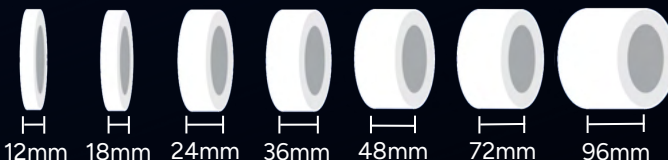

We customize! Contact a representative for special sizes.

Types



Hand



Machine

Colors

Beige

While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The physical and performance characteristics shown are averages obtained from tests recommended by PSTC procedures in our laboratory and the user must by test or otherwise determine suitability for his purpose. There is no warranty of fitness for a particular purpose. Primetac does not take responsibility for the defective material if not stored and used in accordance with the conditions listed above. This specification sheet might change due to the continuous improvement for better quality product.